


## safety suction handle 384


### the ideal suction handle for mounting / lifting

for materials with flat and gas-tight surfaces such as glass, plastic, coated wood, marble, etc.

#### Main features:

- carrying capacity: max. 70 kg (safety factor 2)
- diameter of suction cup: 2 x approx. 200 mm
- control vacuum meter
- safety suction handle with manual vacuum pump
- execution:  
various rubber mixtures according to your required application  
(see reverse side)

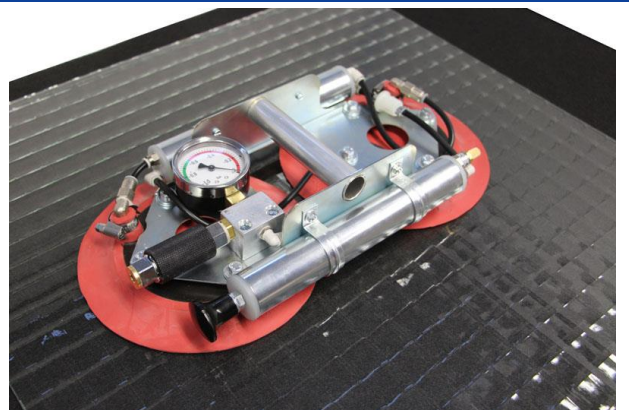

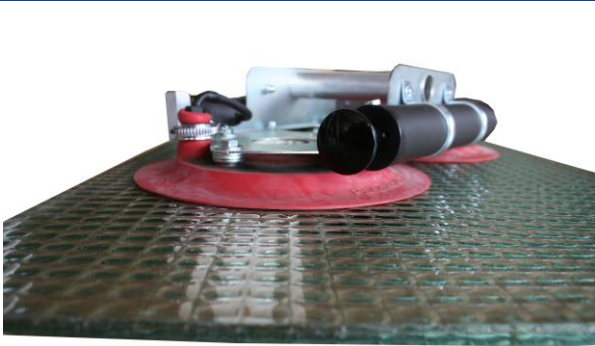


### safety suction handle 384

- black rubber
- abrasion possible
- heat resistant from -2 up to 80 centigrade
- non oil resistant
- **only useable for glass with a thickness of 4 mm or more.**
- **carrying capacity: 70 kg (safety factor 2)**




### safety suction handle 384K

- rubber red – **softer rubber compound**
- abrasion possible
- heat resistant from -2 up to 80 centigrade
- non oil resistant
- **only useable for glass with a thickness of 3 mm or more.**
- **carrying capacity: 70 kg (safety factor 2)**

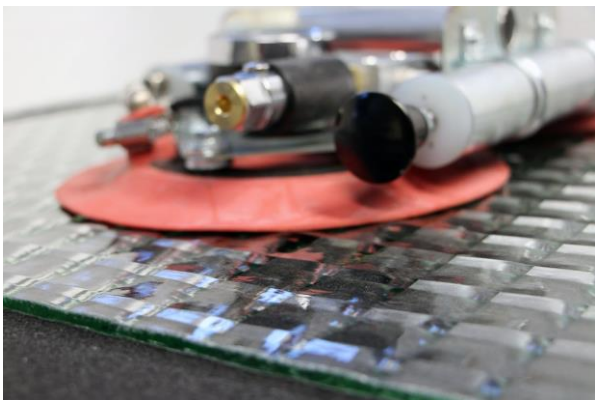

### safety suction handle 384TR

- **small abrasion**
- rubber ivory-coloured
- abrasion possible
- heat resistant from -2 up to 80 centigrade
- non oil resistant
- **only useable for glass with a thickness of 4 mm or more.**
- **carrying capacity: 50 kg (safety factor 2)**

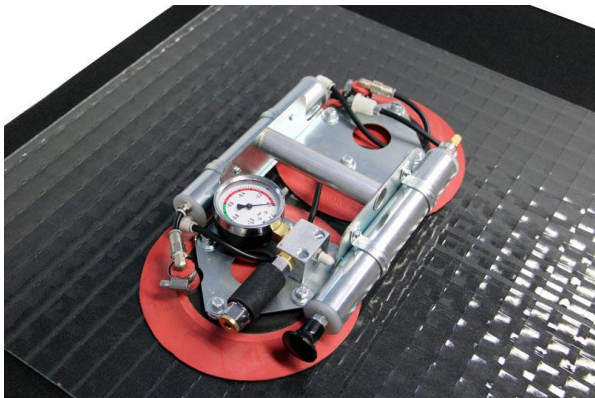

### safety suction handle 384WF

- **small abrasion**
- rubber grey (**silicone rubber**)
- abrasion possible
- **heat resistant from -20 up to 160 centigrade**
- **oil-resistant**
- **only useable for glass with a thickness of 4 mm or more.**
- **carrying capacity: 60 kg (safety factor 2)**